



VETi Universal Tactile Dimmers

Suitable for wire wound and electronic transformers

Trailing Edge Technology

Product Rating:


V404U5 400W (1.8A), 230VAC, 50Hz

200W Dimmable LED / Dimmable CFL

Soft Touch Operation:

- Press bell press switch once to turn on or off.
- Press and hold bell press switch to adjust the light intensity up or down.
- To switch from dimming up to dimming down or vice versa, either release bell press switch and press and hold again or simply hold the bell press switch down and the light intensity will reach maximum or minimum and automatically change direction.

Wiring:

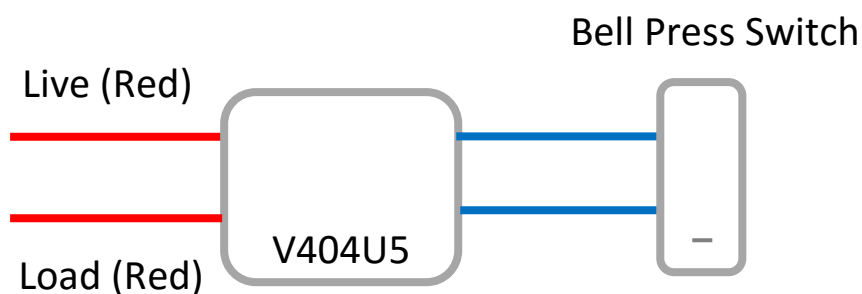

Connect the red wires to live and load respectively – the wires can be connected any way around.

The blue wires must be connected to a bell press for dimming control. Multi way dimming can be used by running strapper wires from the one bell press switch to multiple bell press switches depending on how many places a user chooses to dim from. Only one tactile module is needed per circuit no matter how many positions it is being controlled from.

Warranty:

2 year warranty on correctly installed dimmers.

See VETI Warranty Terms and Conditions for full details.

*Note: Dimmer may get warm when installed

