



INSTRUCTION MANUAL
VDMG2
WIRELESS CHARGING POP UP POWER TOWER



MAJOR TECH (PTY) LTD

South Africa

🌐 www.major-tech.com

✉ sales@major-tech.com

Australia

🌐 www.majortech.com.au

✉ info@majortech.com.au



1. Introduction

Press and pop power tower with wireless charging function, USB A & USB C charging ports and multiple socket outlets for the perfect solution in one unit. The eye-catching glass top finish with blue LED power indication brings elegance and practicality to any location. Common applications include kitchens and offices where accessibility and tidiness are more than just a solution but rather a requirement. It makes wireless charging of smartphones simple by using induction technology built into the top of the power tower which is available when the tower is in both the up and down position. Smartphones must be compatible with wireless charging.

The 8 sockets are arranged so the plug tops do not interfere with one another allowing for all outlets to be used simultaneously. The 2 USB A and 2 USB C charging sockets are ideal for tablets, smartphones and the like. Using the simple push function, the sockets can be raised powerlessly from the tabletop and pushed down out of site when not in use. Installation is quick and simple by tightening the ring nut below the counter when the VDM is mounted in the 121mm cut out.


2. Specifications

Function	Range
Rated Current	16A
Rated Voltage	230V
Max Power	3680W
Wireless Charging	Frequency Band: 105-200KHz Max RF Power: 5W
USB Charger	Max 6.2A / 31W
Length of Cord	1.5m
Protection against Electric Shock	IP20
Certification	IEC, SANS & NRCS
Socket Outlets	2x 16A RSA (SANS164-1) 4x V-Slim RSA (SANS164-2) 2x USB A-Type 2x USB C-Type

3. Installation Steps


Step 1

Drill 121mm cut out.




Step 2

Unscrew and Remove Fixing Ring

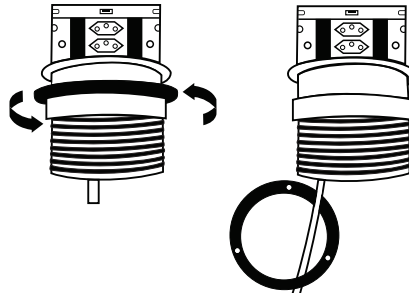


Step 3

Position Power Tower in 121mm Cut-Out.

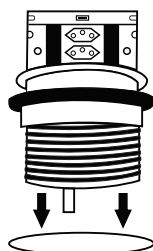


Step 4

Replace fixing ring and tighten to ensure tight fit

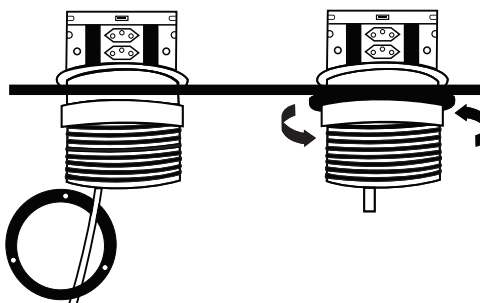

Step 5

Plug power supply into a socket for full connection.

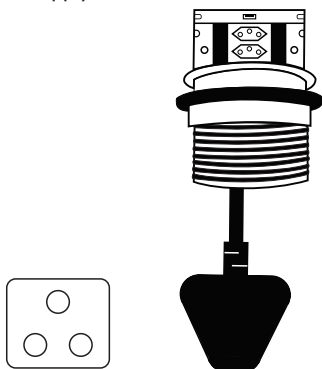

Step 6

Press to Pop up or push down on the top

